



ARBORITEC™

Futureproof Your Floors

WELCOME

TO THE WORLD OF **ARBORITEC**

We are a **Swedish** manufacturer of **high-tech** protective coatings for **hardwood** and **resilient** floors. We design **market-leading**:

- **Ceramic-Fortified** Waterborne Lacquers
- **Floor Oils**
- **Floor Maintenance** Solutions



With our **network** of customers and partners **worldwide**, we create, restore, and protect some of the most **beautiful floors** on the planet.



TABLE OF **CONTENTS**

04	First Coat
06	UVElite
12	CompoAvenue & Genuine
14	EcoTitan & EcoLogic
16	Classic+
18	Miracle Oil
22	Oils
24	Cleaning & Maintenance
26	Full Product Range

EVERY SUCCESSFUL **JOURNEY**

STARTS WITH A **FIRST STEP**

First Coat is an especially designed **base-coat** to prime most wood floors. **Ceramic fortification** gives this **primer** a superior drying time, a rich and smooth surface and is easy to sand back. The ceramic also minimises the risk of side bonding.

First Coat is a protective **ceramic fortified sealer**. Used together with Arboritec lacquers, it provides the first layer in a complete ceramic fortified coat. It is the perfect **foundation** for any of our **waterborne** systems.



Mineral Hardness Comparison

Diamond	8000-8500	
Ceramic	4500-4600	Arboritec's advanced fortifying mineral
Aluminum Oxide	1800-2200	The primary fortifying mineral used on prefinished floors.

Knoop Hardness Test values

CONTENT	Acrylic dispersion
SOLIDS BY VOLUME	38%
SPECIAL FEATURE	Ceramic Fortified
VOC	40g/litre
RECOMMENDED USE	Primer for Arboritec waterborne lacquers.
COVERAGE	8-10m ² per litre
DRYING TIME	20-40 min

Visit www.arboritec.com/products for technical data sheets and safety data sheets for **First Coat**.

THE FUTURE IS **BRIGHT**

OUR **STRONGEST** FINISH **INSTANTLY CURED** WITH UV LIGHT

UVElite is designed for **high traffic** commercial environments. This **instant cure** solution delivers the strongest, most durable, eco-friendly floors with **minimal downtime**.



Instant **Access**

As soon as UVElite is **cured** with a portable UV light, the floor is **ready** for high traffic, minimising **Early Use Damage**.

Versatility

A wise choice for busy **commercial** job sites or even active households on a **variety** of flooring surfaces. **UVElite** can be used on both **wood** and **resilient** floors to provide unrivaled durability, protection and **ease** of maintenance.


CONTENT	Waterborne UV cured polyurethane dispersion	
SOLIDS BY VOLUME	32%	
SPECIAL FEATURE	Ceramic Fortified	
VOC	< 10g/litre	
GLOSS LEVEL	X-Matt	5
	Matt	20
	Satin	45
	Gloss	90
CHEMICAL RESISTANCE	Immediately resistant to grease, water and regular household cleaners.	
COVERAGE	10-12m ² per litre	
READY FOR FULL USE	Immediately after UV curing	

Visit www.arboritec.com/products for technical data sheets and safety data sheets for **UVElite**.

BENEFITS OF UVElite

UVElite minimises early-use damage to recently finished floors. It is instantly cured with **ultraviolet light** from a portable UV machine. UV light **reacts** the **photoinitiators** within the coating, causing them to **instantly bond** and complete the curing process.

The New Durability Standard

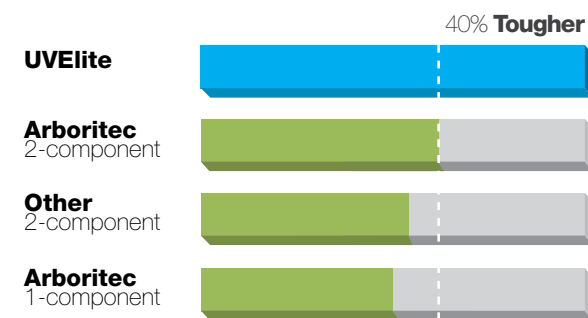


Market Leading Protection

UVElite is over **40% more durable** than most market leading 2-component finishes.

Setting Indoor Air Quality Standards

UVElite has **extremely low** volatile organic compound (**VOC**) levels and contains **less than 2%** of the allowable VOC levels set by some of the **strictest** air quality standard organizations **worldwide**. Given this, **UVElite** is one of **the most sustainable** solutions on the market for protecting floors.

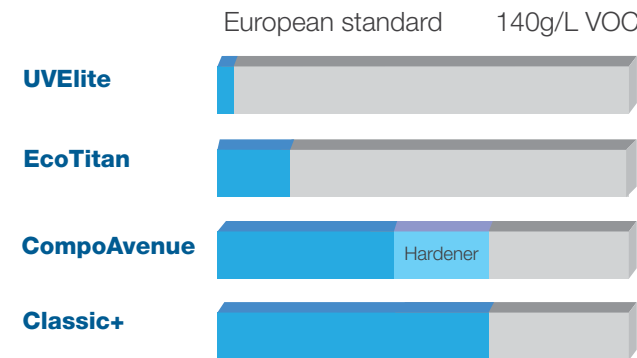

Ease Of Use

UVElite **flows** and **levels** well and has superior **working time**. Unlike 2-component lacquers, there is **no pot-life** or product **waste issue** to worry about.

UVElite Application Process

After the final sanding, **take surface moisture readings** using a **pinless moisture meter** and note these background values.

STEP 1	STEP 2	STEP 3
Apply First Coat	Apply UVElite	Cure with a portable UV machine
DRY TIME Allow background moisture levels to return to original value	DRY TIME Allow background moisture levels to return to original value	FLOOR IS READY FOR USE



COMMERCIAL CASE STUDY

Modern retailing requires solutions that **minimise** commercial downtime.

UVElite

A **busy** coffeeshop added **beauty** and **protection** to their wood floors **without** turning away a single customer. This challenge was met using Arboritec's 2-component oil, **Miracle Oil**, coated with **UVElite** ceramic fortified and **instantly** cured lacquer.

After CompoAvenue, **two coats** of **UVElite** were applied. Due to the **quick drying** characteristics of Arboritec waterborne lacquers, the **total time** to apply this commercial system was only **four hours**. After moisture levels had returned to acceptable limits, the floor was **cured** with UV light.

This beautiful and unique floor was created from **individual** end-grain mesquite blocks. After **sanding**, the floor was screened, vacuumed and damp mopped. **Miracle Oil** was applied to bring to life the **rich tones** of the **end-grain** mesquite and add an **initial layer of protection**. Next, **CompoAvenue** was applied to provide the **optimal chemical bond** between the oil and **UVElite top-coats**.

Once cured, furniture was replaced, **allowing** the business of this high-end coffeehouse to **continue** without interruption. Arboritec's **instant-cure UV** lacquer systems can deliver **commercial grade protection** to high traffic retail environments **overnight**.

POWERFUL PROTECTION

FOR **DEMANDING** ENVIRONMENTS

CompoAvenue and Genuine **set the durability standard** for 2-component waterborne lacquers. These products provide **advanced protection** in **high traffic** commercial settings.

CompoAvenue

The **flagship** of Arboritec's traditional wood floor lacquers. It gives **exceptional adhesion and protection** on all surfaces: new, resanded and pre-finished. Designed for **high-traffic** environments, it can also be used to overcoat our 2 component Miracle Oil.

Genuine

Arboritec's ultra matt **premium** lacquer. Genuine protects the **natural beauty** of any **wood surface** and is ideal for **commercial** floors. This too can be used to overcoat Miracle Oil, giving the wood a depth of colour with no shine.



CompoAvenue

CONTENT	100% Waterborne PU (Polyurethane)
SOLIDS BY VOLUME	32%
SPECIAL FEATURE	Ceramic Fortified
VOC	90g/litre
GLOSS LEVEL	Matt 20 Satin 50 Gloss 85
CHEMICAL RESISTANCE	Resistant to grease, water and regular household cleaners.
COVERAGE	8-10m ² per litre
READY FOR FULL USE	3 days

Genuine

CONTENT	100% Waterborne PU (Polyurethane)
SOLIDS BY VOLUME	32%
SPECIAL FEATURE	Ceramic Fortified
VOC	90g/litre
GLOSS LEVEL	Ultra Matt 5
CHEMICAL RESISTANCE	Resistant to grease, water and regular household cleaners.
COVERAGE	8-10m ² per litre
READY FOR FULL USE	3 days

Visit www.arboritec.com/products for technical data sheets and safety data sheets for **Avenue** and **Genuine**.



A LOGICAL CHOICE

FOR THE PLANET AND YOUR FLOOR

These waterborne lacquers were designed with the health of the contractor, floor owner and **the environment** as our priorities. They comply with **the strictest** global standards for **air quality**.

EcoTitan

Our highest performing **eco** ceramic fortified lacquer is ideal for **commercial** floors. It consistently delivers **extreme durability** with low VOC content.

EcoLogic

This lacquer is the logical choice for **domestic use**. It offers **strong** and **affordable** protection to homeowners who value both indoor **air quality** and durability.

CONTENT	100% Polyurethane dispersion
SOLIDS BY VOLUME	32%
SPECIAL INGREDIENT	Ceramic Fortified
VOC	25g/litre
GLOSS LEVEL	Matt 20 Satin 45
CHEMICAL RESISTANCE	Resistant to grease, water and regular household cleaners.
COVERAGE	8-10m ² /litre
READY FOR FULL USE	7 days

CONTENT	Polyurethane/Acrylate dispersion
SOLIDS BY VOLUME	32%
SPECIAL INGREDIENT	Ceramic Fortified
VOC	55g/litre
GLOSS LEVEL	Matt 20 Satin 45
CHEMICAL RESISTANCE	Resistant to grease, water and regular household cleaners.
COVERAGE	8-10m ² /litre
READY FOR FULL USE	7 days



Visit www.arboritec.com/products for technical data sheets and safety data sheets for **EcoTitan** and **EcoLogic**.

HOUSTON...



WE HAVE NO PROBLEMS

Classic+ brings reliable **cutting-edge** technology for durable floor protection. This lacquer will fulfill the **majority** of flooring jobs as it can even be made into a 2-component lacquer using an Arboritec hardener. This will increase durability and wear, and **reduce** the curing time to 3 days.



A **versatile**, forgiving lacquer that always exceeds expectations, **Classic+** is the best choice for a commercial **1-component** lacquer on the market.

CONTENT	100% Polyurethane dispersion	
SOLIDS BY VOLUME	32%	
SPECIAL FEATURE	Ceramic Fortified	
VOC	80g/litre	
GLOSS LEVEL	X-Matt	5
	Matt	20
	Satin	45
	Gloss	85
CHEMICAL RESISTANCE	Resistant to grease, water and regular household cleaners.	
COVERAGE	8-10m² per litre	
READY FOR FULL USE	7 days	



Visit www.arboritec.com/products for technical data sheets and safety data sheets for **Classic+**.

GET CREATIVE

WITH COLOUR

Create the exact colour you want with the look and feel of **natural** wood. This **2-component** oil is available in **six** base colours that can be mixed and matched.

Miracle Oil is a 2-component oil for wood floors **designed** to withstand heavy wear and tear. It dries quickly bringing out the natural **grain** of the wood. Miracle Oil is **unique**, because it can be **top-coated with any** Arboritec 2-component waterborne lacquer for **added** protection and **ease** of maintenance.



CONTENT Urethane-modified pinewood
and linseed oil
Solvent-free

SOLID CONTENT 100%

VOC Zero VOC

COLOURS Black
Grey
White
Natural
Brown
Red-Brown

COVERAGE ~ 30-50m² per litre
(depending on wood type)

READY FOR FULL USE 12 hours

READY FOR COATING 16 hours

CUSTOM COLOUR

Miracle Oil comes in **six base colours**. These are only the starting point for all available colour options. **Combine colours** with different **wood** species to create your perfect look.

- **One-time** application process
- **More durable** and scratch resistant than traditional oils
- **Easier to maintain** than a natural oiled floor
- **Can be overcoated** with any Arboritec 2-component waterborne lacquer
- **100% solid**, solvent free
- **Drying time:** 12 hours
- **Coverage:** 30-50m² per litre

BLACK

GRAY

WHITE

NATURAL

BROWN

RED-BROWN

IT'S TIME

Millic Comfort

Millic Comfort is **1-component** natural oxidative oil based on **pinewood** oil. It gives consistently great results and is suitable for **commercial** use. Millic Comfort is easy to maintain, and has low odour.



- **83%** solids
- **Available in** natural and white

CONTENT	Urethane-modified pinewood oil
SOLID CONTENT	83%
COLOURS	White Natural
COVERAGE	15-20m ² per litre (depending on wood type)
DRYING TIME	3-24 hours to final polish 10 hours after final polish

Hard Wax Oil

Arboritec Hard Wax Oil is an **oxidative** hardening Hard Wax Oil **based on** renewable natural ingredients such as pine resin oil, waxes and linseed oil. It is suitable for all **indoor wood types** and surfaces; floors, furniture and internal woodwork.

- **High resistance** to wear and tear
- **Easy and quick** to work with

CONTENT	Urethane-modified pine resin oil, linseed oil, waxes
SOLID CONTENT	45%
COVERAGE	20-30m ² per litre (depending on wood type)
DRYING TIME	2 hours on first coat 24 hours on second coat



TO OIL UP

China Oil

China Oil is a high performance **outdoor oil** based on Chinese Tung oil (85% solid content). Suitable for all kinds of untreated wood in outdoor areas, the **low viscosity** allows the oil to penetrate deep into the wood and give a **high level** of protection.



- **Contains no** fungicide
- **Available in** natural and teak

CONTENT	Tungoil and solvents
SOLID CONTENT	41%
COLOURS	Teak Natural
COVERAGE	5-8m ² per litre (depending on wood type)
DRYING TIME	24-36 hours (depending on weather conditions and wood type)



Visit www.arboritec.com/products for technical data sheets and safety data sheets for **oils**.

CLEANING

Cleaner

Arboritec Cleaner is a neutral cleaning product specially formulated for **oiled** and **lacquered** wooden floors. You can also use this product on floors made of PVC, linoleum, vinyl, laminate and washable surfaces such as stone, tiles, glass, porcelain etc.



- **Solvent free** - Safe for the environment
- **Removes tough-to-clean** dirt and spills
- **Fast drying** without any streaks or smears
- **No harmful** odors or toxins
- **Available in:**
 - 750ml Spray Bottle
 - 1 litre Refill
 - 5 litre Refill
 - 1 litre Concentrate
 - 5 litre Concentrate
 - Floor Care Kit incl. 750ml Spray Bottle
 - Spray Mop Kit incl. 1 litre Refill
- **Not for use on** waxed floors

Cleaning

Before cleaning your floor, remove all loose particles which might scratch the surface by vacuuming or sweeping. Arboritec Cleaner should be diluted as per instructions and applied using a Spray Mop or a dampened household mop.

Whilst mopping, rinse the Spray Mop pad or household mop regularly in clear water to remove collected dirt. Rinsing the floor after cleaning is not necessary.



MAINTENANCE

Refresher

To keep your **lacquered** floor in perfect condition and prevent it from wear effects it should be **maintained** with Refresher after every **5th** time using the Cleaner.

- **Modern maintenance** for lacquered wood, laminate, vinyl, PVC or linoleum floors
- **Dissolves itself** with each new application to avoid product build up
- **Reduces visual signs** of aging, wear and micro-scratches



Oil Refresher

To keep your **oiled** floor in great condition and prevent it from wear effects it should be **maintained** with Oil Refresher instead of Cleaner every **5th** clean.

- **Saponified pine wood oil** to refresh the surface of oiled floors
- **Makes floors more resistant** to wear and prolongs the intervals between re-oiling renovation
- **Reduces visual signs** of aging and wear



Satin Oil

Arboritec Satin maintenance oil can be used on **all kinds of oiled floors**; natural oils, 2 component oils and hard wax oils. It is fast drying, provides excellent coverage and delivers good **protection** for your floor.

- **For maintenance or heavy cleaning** of all oiled surfaces
- **Fast drying** with good coverage
- **Low odour**, the solvents used require no warning labels



Visit www.arboritec.com/products for technical data sheets and safety data sheets for **cleaning & maintenance products**.

PRODUCT RANGE

ARBORITEC™

Visit www.arboritec.com/products for complete floor and finish preparation procedures, application instructions, and MSDS.

First Coat Primer

Use First Coat, high-solid clear primer, to prime the floor for all Arboritec waterborne lacquers. First Coat minimises grain raise and provides excellent adhesion on all wood floors.

SPECIAL FEATURE	Ceramic Fortified
RECOMMENDED USE	Commercial & Residential
CONTENT	Acrylic dispersion
SOLIDS BY VOLUME	38%
VOC	40g/L
COVERAGE	8-10m ² per litre
DRYING TIME	20-40 min
PACKAGING	3x5 litre per box 48 boxes per pallet
ITEM NR	5L 1175



Clean'n Coat

Clean 'n Coat is an adhesion enhancer that deep cleans and prepares an already lacquered surface for a new coat of 2-component lacquer. For use on all polyurethane factory-, and site-finished wood floors.

RECOMMENDED USE	Commercial & Residential
CONTENT	Solvents and water
DILUTION	5% (50ml in 1l water)
DRYING TIME	10-30 min
PACKAGING	10x0.75 litre (spray bottle) per box 6x1 litre per box 3x5 litre per box
ITEM NR	0.75ml 5157 1L 5091 5L 5095



FillerMix

FillerMix is a waterborne binder for the preparation of wood putty. Combined with the sanding dust from the wooden floor on which it will be used, it is designed to fill in cracks and joints. This first rate product is both quick drying and easy to sand.

RECOMMENDED USE	Commercial & Residential
CONTENT	Fibre-reinforced acrylate copolymer
COVERAGE	8-10m ² per litre
DRYING TIME	3-24 hours to final polishing 10 hours after final polishing
PACKAGING	6x1 litre per box 3x5 litre per box
ITEM NR	1L 6201 5L 6205





UVElite

1 COMPONENT

UVElite is designed for high traffic commercial environments. This instant cure solution delivers the strongest, most durable, eco-friendly floors with minimal interruption.

SPECIAL FEATURE	Ceramic Fortified	
RECOMMENDED USE	Commercial	
CONTENT	100% UV-curable Waterborne PU (Polyurethane)	
SOLIDS BY VOLUME	32%	
VOC	< 10g/litre	
GLOSS LEVEL	X-Matt 5 / Matt 20 / Satin 45 / Gloss 90	
COVERAGE	10-12m ² per litre	
READY FOR FULL USE	Immediately after UV curing	
PACKAGING	3x4 litre per box 48 boxes per pallet	
ITEM NR	X-Matt 5	43.1304
	Matt 20	43.1204
	Satin 45	43.1104
	Gloss 90	43.1004



CompoAvenue

2 COMPONENT

The flagship of Arboritec's traditional wood floor lacquers. It gives exceptional adhesion and protection on all surfaces: new, resanded and pre-finished. Designed for high-traffic environments.

SPECIAL FEATURE	Ceramic Fortified	
RECOMMENDED USE	Commercial	
CONTENT	100% Waterborne PU (Polyurethane)	
SOLIDS BY VOLUME	32%	
VOC	90g/litre (with Hardener)	
GLOSS LEVEL	Matt 20 / Satin 45 / Gloss 85	
COVERAGE	8-10m ² per litre	
READY FOR FULL USE	3 Days	
PACKAGING	3x4.5 litre per box 48 boxes per pallet	
ITEM NR	Matt 20	2314
	Satin 45	2324
	Gloss 85	2334



Genuine

2 COMPONENT

Arboritec's ultra matt premium lacquer. Genuine protects the natural beauty of any wood surface and is ideal for commercial floors.

SPECIAL FEATURE	Ceramic Fortified	
RECOMMENDED USE	Commercial	
CONTENT	100% Waterborne PU (Polyurethane)	
SOLIDS BY VOLUME	32%	
VOC	90g/litre (with Hardener)	
GLOSS LEVEL	Ultra Matt 5	
COVERAGE	8-10m ² per litre	
READY FOR FULL USE	3 Days	
PACKAGING	3x4.5 litre per box 48 boxes per pallet	
ITEM NR	Ultra Matt 5	2304



Classic+

1 COMPONENT

A versatile, forgiving lacquer that always exceeds expectations, Classic+ is the best choice for a commercial 1-component lacquer on the market.

SPECIAL FEATURE	Ceramic Fortified	
RECOMMENDED USE	Commercial	
CONTENT	100% Waterborne PU (Polyurethane)	
SOLIDS BY VOLUME	32%	
VOC	80g/litre	
GLOSS LEVEL	X-Matt 5 / Matt 20 / Satin 45 / Gloss 85	
COVERAGE	8-10m ² per litre	
READY FOR FULL USE	7 Days	
PACKAGING	3x5 litre per box 48 boxes per pallet	
ITEM NR	X-Matt 5	2405
	Matt 20	2415
	Satin 45	2425
	Gloss 85	2435



EcoTitan

1 COMPONENT

Our highest performing eco-friendly, ceramic fortified lacquer is ideal for high traffic commercial floors. It consistently delivers extreme durability with low VOC content.

SPECIAL FEATURE	Ceramic Fortified	
RECOMMENDED USE	Commercial	
CONTENT	100% Waterborne PU (Polyurethane)	
SOLIDS BY VOLUME	32%	
VOC	25g/litre	
GLOSS LEVEL	Matt 20 / Satin 45	
COVERAGE	8-10m ² per litre	
READY FOR FULL USE	7 Days	
PACKAGING	3x5 litre per box 48 boxes per pallet	
ITEM NR	Matt 20	2715
	Satin 45	2725



EcoLogic

1 COMPONENT

This lacquer is the logical choice for domestic use. It offers strong and affordable protection to homeowners who value both indoor air quality and durability.

SPECIAL FEATURE	Ceramic Fortified	
RECOMMENDED USE	Residential	
CONTENT	Waterborne Poyurethane/Acrylic dispersion	
SOLIDS BY VOLUME	30%	
VOC	55g/litre	
GLOSS LEVEL	Matt 20 / Satin 45	
COVERAGE	8-10m ² per litre	
READY FOR FULL	7 Days	
USE	3x5 litre per box 48 boxes per pallet	
PACKAGING	Matt 20	
ITEM NR	Satin 45	2815
		2825

Miracle Oil

2 COMPONENT

Miracle Oil is a 2-component oil for wood floors designed to withstand heavy wear and tear. It dries quickly bringing out the natural grain of the wood. Miracle Oil is unique, because it can be top-coated with any Arboritec 2-component waterborne lacquer for added protection and ease of maintenance. This 2-component oil is available in six base colours that can be mixed and matched.



SPECIAL FEATURE	Top-coatable with any Arboritec 2-component finish.	
RECOMMENDED USE	Commercial & Residential	
CONTENT	Urethane modified polymer based on pinewood and linseed oils. Solvent free. Hardener contains isocyanates.	
SOLIDS BY VOLUME	100%	
COLORS	100%	
COVERAGE	Natural / White / Red-Brown / Brown / Black / Grey	
READY FOR FULL USE	30-50m² per litre (depending on wood type)	
PACKAGING	12 Hours	
ITEM NR	1.05 litre (including hardener)	
	2.8 litre (including hardener)	
	1.05L Natural	3001
	1.05L White	3002
	2.8 L Natural	3003
	2.8L White	3004
	1.05L Red-Brown	3015
	1.05L Brown	3016
	1.05L Black	3017
	1.05L Grey	3018

Hard Wax Oil

Arboritec Hard Wax Oil is an oxidative hardening Hard Wax Oil based on renewable natural ingredients such as pine resin oil, waxes and linseed oil. It is suitable for all indoor wood types and surfaces; floors, furniture and internal woodwork.



CONTENT	Urethane-modified pine resin oil, linseed oil, waxes	
SOLID CONTENT	45%	
COVERAGE	20-30m² per litre (depending on wood type)	
DRYING TIME	2 hours on first coat 24 hours on second coat	
PACKAGING	6x1 litre per box 100 boxes (600 litre) per pallet 5 litre metal can 120 cans (600 litre) per pallet	
ITEM NR	1L	5390
	5L	5395

Millic Comfort

Millic Comfort is 1-component natural oxidative oil based on pinewood oil. It gives consistently great results and is suitable for commercial use. Millic Comfort is easy to maintain, and has low odour.



CONTENT	Urethane-modified pinewood oil	
SOLID CONTENT	83%	
COLOURS	Natural / White	
COVERAGE	15-20m² per litre (depending on wood type)	
DRYING TIME	3-24 hours to final polish 10 hours after final polish	
PACKAGING	6x1 litre per box 100 boxes (600 litre) per pallet 5 litre metal can 120 cans (600 litre) per pallet	
ITEM NR	1L Natural	3101
	1L White	3111
	5L Natural	3105
	5L White	3115

China Oil

China Oil is a high performance outdoor oil based on Chinese Tung oil (85% solid content). Suitable for all kinds of untreated wood in outdoor areas, the low viscosity allows the oil to penetrate deep into the wood and give a high level of protection.



CONTENT	Tungoil and solvents	
SOLID CONTENT	41%	
COLOURS	Natural / Teak	
COVERAGE	5-8m² per litre (depending on wood type)	
DRYING TIME	24-36 hours (depending on weather conditions and type of wood)	
PACKAGING	6x1 litre per box 100 boxes (600 litre) per pallet 5 litre metal can 120 cans (600 litre) per pallet	
ITEM NR	1L Natural	3401
	1L Teak	3402
	5L Natural	3405

Cleaner



Arboritec Cleaner is a neutral cleaning product specially formulated for oiled and lacquered floors. You can also use this product on floors made of PVC, linoleum, vinyl, laminate and washable surfaces such as stone, tiles, glass, porcelain etc... Leaves no film and has a neutral, clean scent.

RECOMMENDED USE	All factory-, and site finished wood and resilient floors.	
	CONTENT	Ethoxylated hydrocarbons
	DILUTION	(Not for Cleaner Spray or Cleaner Refill) Oiled floors: 1:200; 5ml/1l water (20°C) Lacquered floors: 1:100; 10ml/1l water (30°C) Heavy cleaning: 1:20; 50ml/1l water (30°C)
PACKAGING	10x0.75 litre Spray Bottle per box 6x1 litre plastic can per box	
ITEM NR	1L Concentrate	5101
	1L Refill	5109
	5L Concetrate	5110
	5L Refill	5105
	0.75 Spray	5107

Refresher

To keep your lacquered floor in perfect condition and prevent it from wear effects it should be maintained with Refresher after every 5th time using the Cleaner. Refresher can be used for periodic maintenance on all polyurethane factory-, or site-finished wood floors.

RECOMMENDED USE	All polyurethane finished wood floors	
	CONTENT	Copolymer-Acrylate, Ammoniac solution
	SOLIDS BY VOLUME	4%
DRYING TIME	~ 1 Hour	
PACKAGING	6x1 litre per box	
	3x5 litre per box	
ITEM NR	1L	5111
	5L	5115



Spray Mop Kit



This cartridge style spray mop has a handy spray handle to easily and precisely control the even disbursement of Cleaner. Includes spray mop pole, mop base, grey microfiber pad and 1 litre Arboritec Cleaner Refill. Can also be used to apply Refresher or Oil Refresher.

RECOMMENDED USE	All factory-, and site-finished wood and resilient floors.	
INCLUDES	1 litre Cleaner Refill, Microfibre Pad & Easy to handle Spray Mop Pole	
ITEM NR	Spray Mop Kit	5001

Oil Refresher

To keep your oiled floor in great condition and prevent it from the effects of day to day wear, it should be maintained with Oil Refresher. Use Oil Refresher instead of Cleaner every 5th clean and your floor will look better and have extra protection between re-oilings.

RECOMMENDED USE	All oiled wood floors	
	CONTENT	Saponified pine wood oil, Solvent free
	DILUTION	1:20 Refresher to cold water (<20°C) (50ml Refresher to 1L of water)
SOLIDS BY VOLUME	4%	
COLOURS	Natural / White	
DRYING TIME	~ 1 Hour	
PACKAGING	6x1 litre per box	
	3x5 litre per box	
ITEM NR	1L Natural	5281
	1L White	5282
	5L Natural	5285



Floor Care Kit



Floor Care Kit is designed for optimal cleaning results. Includes a sturdy aluminum pole that adjusts to a variety of heights for comfort, a 750ml spraybottle of Arboritec Cleaner, and a blue microfiber mop pad.

RECOMMENDED USE	All factory-, and site-finished wood and resilient floors.	
INCUEDES	750ml Cleaner, Microfibre Pad & Telescopic Mop Pole	
ITEM NR	Floor Care Kit	5000

Satin Oil

The perfect choice to occasionally deep clean or touch up oil treated wood floors. It is fast drying, provides excellent coverage and delivers good protection for your floor. Arboritec Satin maintenance oil can be used on all kinds of oiled floors; natural oils, 2 component oils and hard wax oils.

RECOMMENDED USE	All oiled wood floors	
	CONTENT	Urethane modified pinewood oil. Solvent Paraffin
	SOLIDS BY VOLUME	38%
COLOURS	Natural / White	
DRYING TIME	3-8 Hours after buffing	
PACKAGING	6x1 litre per box	
	100 boxes (600 litre) per pallet	
	5 litre metal can	
	120 cans (600 litre) per pallet	
ITEM NR	1L Natural	3301
	1L White	3311
	5L Natural	3305



Hardener




Hardner can be used along with any 100%PU Arboritec lacquer with the exception of UVElite. The addition of a hardener (at a ratio of 1:10) will increase the curing time of the lacquer to 3 days, and make the finished floor harder wearing and more durable. Included with Arboritec 2-component finishes: CompoAvenue and Genuine. Also available for purchase individually.

RECOMMENDED USE	Use with any Arboritec 2-component finish.		
CONTENT	Contains Isocyanites		
PACKAGING	24x450ml per box		
ITEM NR	450ml	2004	

Roller Sleeves

These high quality, microfibre roller sleeves can be used with any waterborne or oil-based finish.

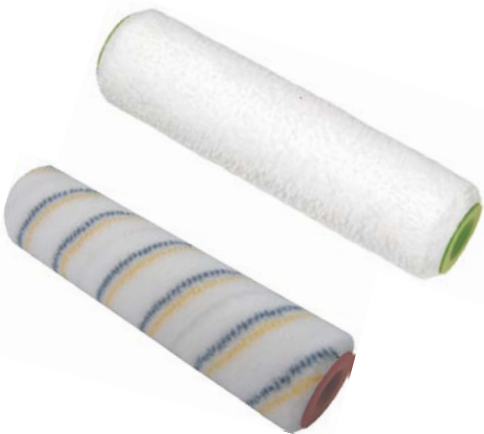

RECOMMENDED USE	Use with Arboritec roller handle and adjustable telescopic roller pole.		
ITEM NR	10mm (for lacquers)	7091	
	6mm (for oils)	7095	

Extender



Use this product if you are applying lacquer in warm or dry conditions, (< 40% RH and >25oC). Extender can be used to increase the open time of any of our range Arboritec waterborne products with the exception of UVElite.

RECOMMENDED USE	Use with any Arboritec 2-component finish.		
CONTENT	Contains Isocyanites		
PACKAGING	16x100ml per box		
ITEM NR	100ml	2003	

Roller Handle

This sturdy roller handle fits all Arboritec roller sleeves. Designed with a convenient snap mount handle.



RECOMMENDED USE	Use with Arboritec adjustable telescopic roller pole.		
ITEM NR	Roller Handle	7092	

Microfibre Pads

These microfibre pads will effectively trap and remove dirt and dust from floor surface. Designed for use with Arboritec Floor Care Kit and Spray Mop Kit. Machine washable. Avoid fabric softeners for optimal, long-term results.

RECOMMENDED USE	All wood and resilient floors.		
ITEM NR	Spray Mop Kit Pad	5003	
	Floor Care Kit Pad	5004	

Roller Pole

Adjustable inter-locking roller pole that extends to 6.5 feet. Use the snap mount end to lock in the roller handle for ease of use.

RECOMMENDED USE	Use with Arboritec roller handle.		
ITEM NR	Roller Pole	7096	



FUTUREPROOF YOUR FLOORS



📍 Arboritec AB
Olof Wijksväg 9
444 65 Jörlanda
SWEDEN

🌐 www.arboritec.com

✉️ info@arboritec.com

☎️ (+46) 303 56330

📘 /ArboritecUSA

🐦 /Arboritec

🌐 /Arboritec-USA

Photos: Courtesy NASA/JPL-Caltech