

TO THE WORLD OF ARBORITEC

We are a **Swedish** manufacturer of **high-tech** protective coatings for hardwood and resilient floors. We **design** market-leading:

- **Ceramic-Fortified** Waterborne Finishes
- **Penetrating Oil** Finishes
- Floor Maintenance Solutions

We work with our network of customers and partners **worldwide**, to create, restore, and protect some of the most **beautiful floors** on the planet.

TABLE OF CONTENTS

This **product guide** is provided to help you select **the best** Arboritec options for **your specific needs.**



04 First Coat

06 UVElite

12 Avenue & Genuine

14 Elite

16 Classic+

18 Miracle Oil

Maintenance

26 Recommended Systems

30 Restoration Guide

Full Product Line

42 Arboritec Flooring Elite

EVERY SUCCESSFUL JOURNEY



STARTS WITH A FIRST STEP


The ideal base coat for any residential or commercial floor, First Coat provides a high quality build. This waterborne sealer dries faster, penetrates deeper and has a very high **solid** content.





First Coat is a protective **ceramic fortified sealer.** It is the perfect **foundation** for any of our waterborne finishes.

Mineral Hardness Comparison



Knoop Hardness Test values

CONTENT Polyurethane/Acrylic dispersion **SOLIDS BY VOLUME** ~ 40%

SPECIAL FEATURE Ceramic Fortified

VOC Max 100g/L **RECOMMENDED USE** Sealer for Arboritec waterborne


finishes.

COVERAGE 400-500 ft² per gallon

DRYING TIME 20-60 min.

Visit www.arboritec.com/products for complete floor and finish preparation procedures, application instructions, and MSDS for **First Coat**.

THE FUTURE IS BRIGHT

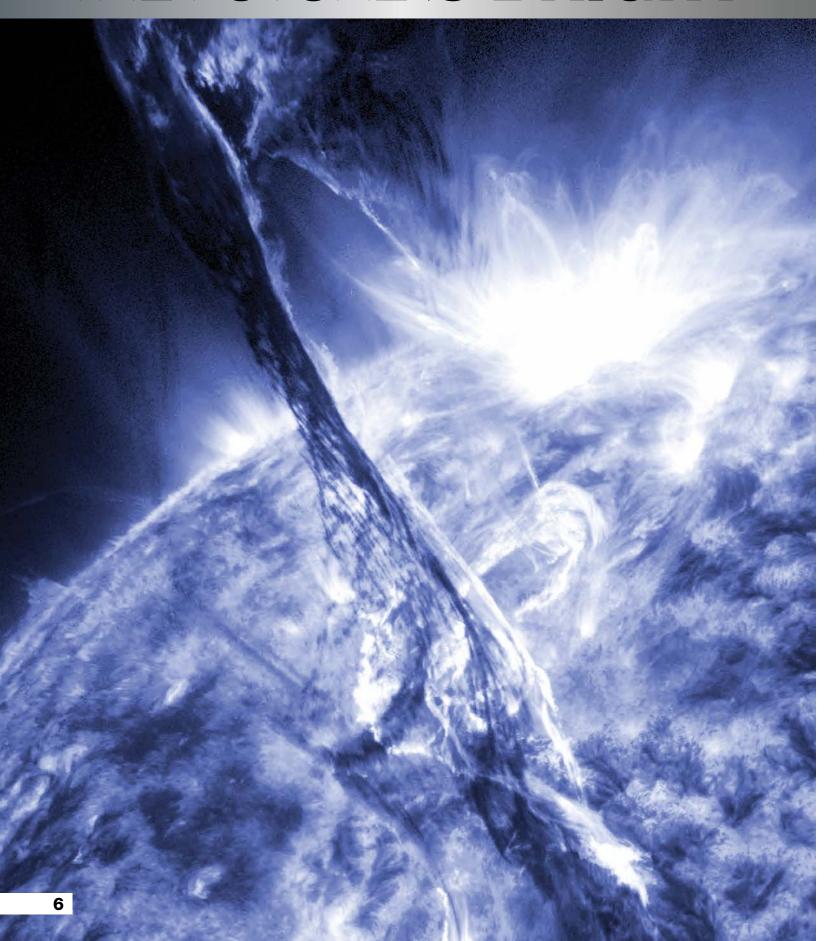

OUR STRONGEST FINISH INSTANTLY CURED WITH UV LIGHT

UVElite is designed for **high traffic** commercial and residential environments. This **instant cure** solution delivers the strongest, most durable, eco-friendly floors with **minimal interruption**.





Instant Access

As soon as UVElite is **cured** with a portable UV light, the floor is **ready** for high traffic, minimizing **Early Use Damage.**

Versatility

A wise choice for busy **commercial** job sites and **active households** with a **variety** of flooring surfaces. UVElite can be used on both **hardwood** and **resilient** floors to provide unrivaled durability, **protection** and ease of maintenance.

CONTENT Waterborne UV cured polyurethane dispersion

SOLIDS BY VOLUME ~ 32%

SPECIAL FEATURE VOC Max 17g/L

GLOSS LEVEL Ultra Matte 5
Satin 20
Semi Gloss 45
Gloss 90

CHEMICAL RESISTANCE Immediately resistant to grease, water and regular household cleaners and detergents.




COVERAGE 500-600 ft² per gallon **READY FOR FULL USE** Immediately after UV curing

Visit **www.arboritec.com/products** for complete floor and finish preparation procedures, application instructions, and MSDS for **UVElite.**

BENEFITS OF UVElite

The New Durability Standard

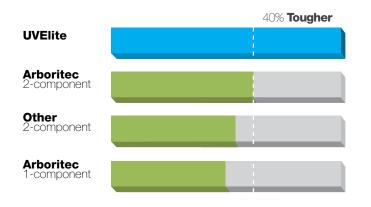

Market Leading **Protection**


UVElite is over **40% more durable** than most market leading 2-component finishes.

UVElite minimizes early-use damage to recently finished floors. It is instantly cured with **ultraviolet light** from a portable UV machine. UV light **reacts** the **photoinitiators** within the coating, causing them to **instantly bond** and complete the curing process.

Setting Indoor Air Quality Standards

Leadership in Energy and Environmental Design (LEED) guidelines are the **standard** for **Indoor Air Quality.**

UVElite has extremely low volatile organic compound **(VOC)** levels and is **free** from **NMP** and isocyanites, found in several competing products. In fact, UVElite contains **less** than **2% of the allowable** VOC levels set by some of the strictest air quality standard organizations worldwide. Given this, UVElite is one of **the most sustainable** solutions on the market for protecting floors.



Next Generation Restoration & Maintenance Resilient Flooring

UVElite quickly **restores** the durability of factory-applied finishes, **eliminating** the need to replace the floor prematurely. Maintenance procedures and **chemicals** can be **reduced** while extending the **life** of the floor.

FASE OF USE

UVElite **flows** and **levels** well and has superior **open time** for extended workability. Unlike 2-component finishes, there are **no pot-life** or product **waste issues** to worry about.

UVElite Application Process

Before you get started, **take surface moisture readings** using a **pinless moisture meter** and note these background values.

STEP 1

Apply Base Coat

DRY TIME

Allow background moisture levels to return to original value

STEP 2

Apply UVElite

DRY TIME

Allow background moisture levels to return to original value

STEP 3

Cure with a portable UV machine

FLOOR IS READY FOR USE





POWERFUL PROTECTION



FOR DEMANDING ENVIRONMENTS

Avenue and Genuine set the **durability standard** for 2-component waterborne finishes. These products provide **advanced protection** in **high traffic** commercial settings and **active households**.

Avenue

The **flagship** of Arboritec's traditional wood floor finishes. **Exceptional protection** and **adhesion** on all surfaces: new, resanded and engineered. Designed for **high-traffic** environments.

Genuine

Arboritec's ultra matte **premium** finish. Genuine emphasizes the **natural beauty** of any **wood surface** and is ideal for **commercial and residential** floors where **the look** of a natural wood is desired.





Avenue

CONTENT 100% Waterborne PU (Polyurethane) **SOLIDS BY VOLUME** ~ 32%

SPECIAL FEATURE Ceramic Fortified VOC Max 200g/L GLOSS LEVEL Satin

Semi Gloss 50
Gloss 85

CHEMICAL RESISTANCE Resistant to grease, water and

regular household cleaners and detergents.

COVERAGE 350-400 ft² per gallon **READY FOR FULL USE** 3-5 days

Genuine

CONTENT 100% Waterborne PU (Polyurethane)
SOLIDS BY VOLUME ~ 32%
SPECIAL FEATURE Ceramic Fortified

VOC Max 165g/L
GLOSS LEVEL Ultra Matte 5
CHEMICAL RESISTANCE Resistant to grease, water and regular household

coverage cleaners and detergents.
350-400 ft² per gallon
3-5 days


Visit www.arboritec.com/products

for complete floor and finish preparation procedures, application instructions, and MSDS for **Avenue** and **Genuine**.





THE RIGHT STUFF

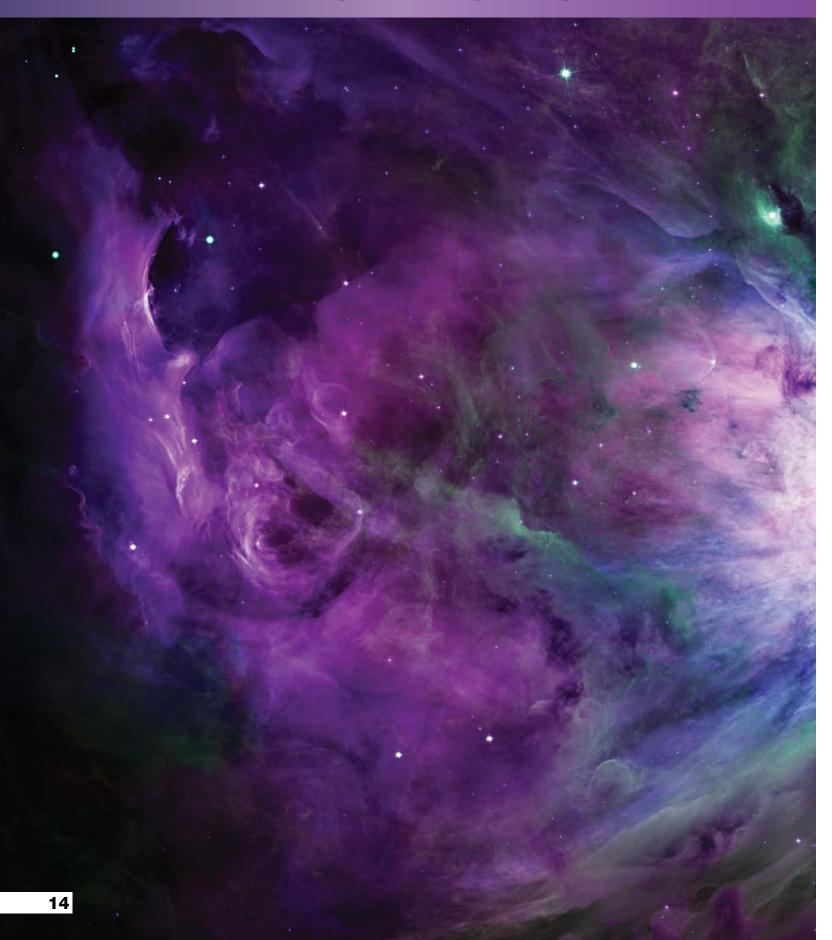

FOR COMMERCIAL SPACE

Highest performing 1-component waterborne finish, built on a similar platform as Avenue and Genuine. Unlike its 2-component siblings, Elite **does not require adding a hardener** to provide protection for commercial, or demanding residential floors.





Elite **offers** more coverage, no waste and less hassle **without sacrificing** durability. With this unique finish, **less** is **truly more.**

CONTENT 100% Waterborne PU (Polyurethane)

SOLIDS BY VOLUME ~ 32% **SPECIAL FEATURE** Ceramic Fortified

VOC Max 200g/L

GLOSS LEVEL Matte 15 Satin 40

CHEMICAL RESISTANCE Resistant to grease, water and regular household


cleaners and detergents.

COVERAGE 500-600 ft² per gallon

READY FOR FULL USE 5-7 days

Visit **www.arboritec.com/products** for complete floor and finish preparation procedures, application instructions, and MSDS for **Elite.**

HOUSTON...

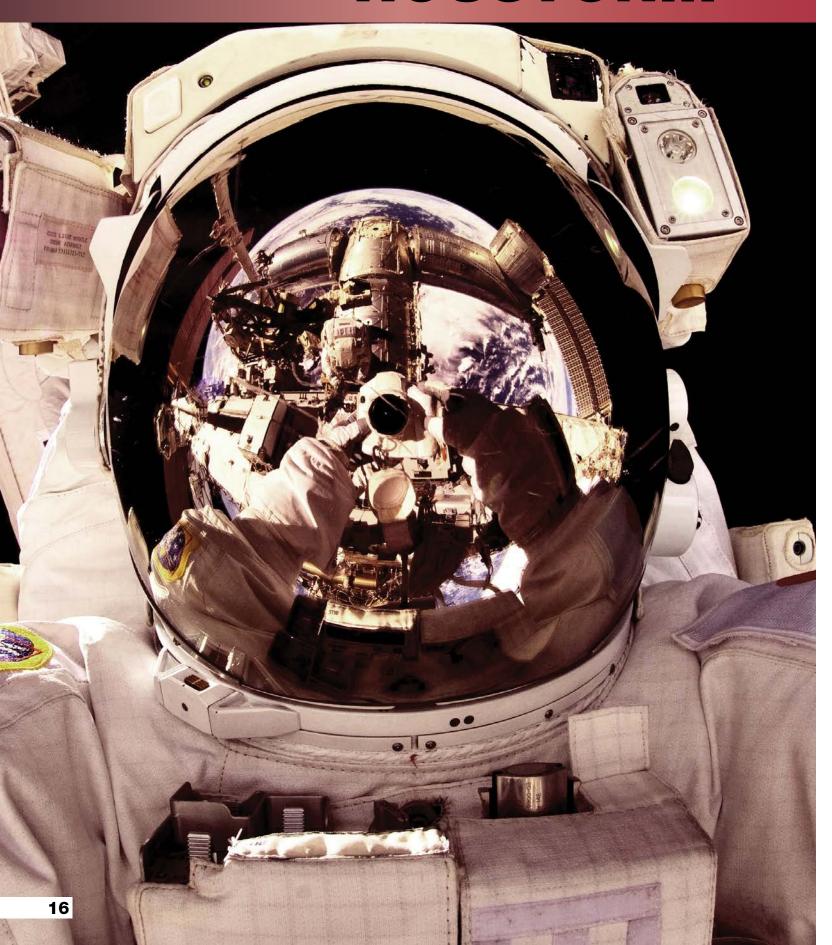

WE HAVE NO PROBLEMS

Classic+ brings **reliable cutting-edge technology** to any household looking for **durable** floor protection.

Achieve **optimal** toughness in only 2 coats.



CERAMIC FORTIFIED

WATERCORRE WOOD FLOOR PINGS MITH

EXTERNEN SOUTH AND AND TECHNOLOGY

Fast Cive Time

Extendey Tough and Durable One-Part Finish

Fast Cive Time

Excellent Adhesion Properties for Reconting

Excellent Adhesion Properties for Reconting

Exceptional Flow and Leveling

COMMERCIAL USE

1 SALLON

A versatile, forgiving finish that performs well over a wide variety of sealers, stains and finishes. If you've never tried a **ceramic fortified** finish from **Arboritec** before, **Classic+** is a very good place to start.

CONTENT 100% Polyurethane

dispersion

SOLIDS BY VOLUME ~ 32% **SPECIAL FEATURE** Ceramic Fortified

VOC Max 250g/L

GLOSS LEVEL Satin

Semi Gloss 45

20

CHEMICAL RESISTANCE Resistant to grease,

water and regular household cleaners


and detergents.

COVERAGE 500-600 ft² per gallon

READY FOR FULL USE 5-7 days

Visit **www.arboritec.com/products** for complete floor and finish preparation procedures, application instructions, and MSDS for **Classic+**.

GET CREATIVE

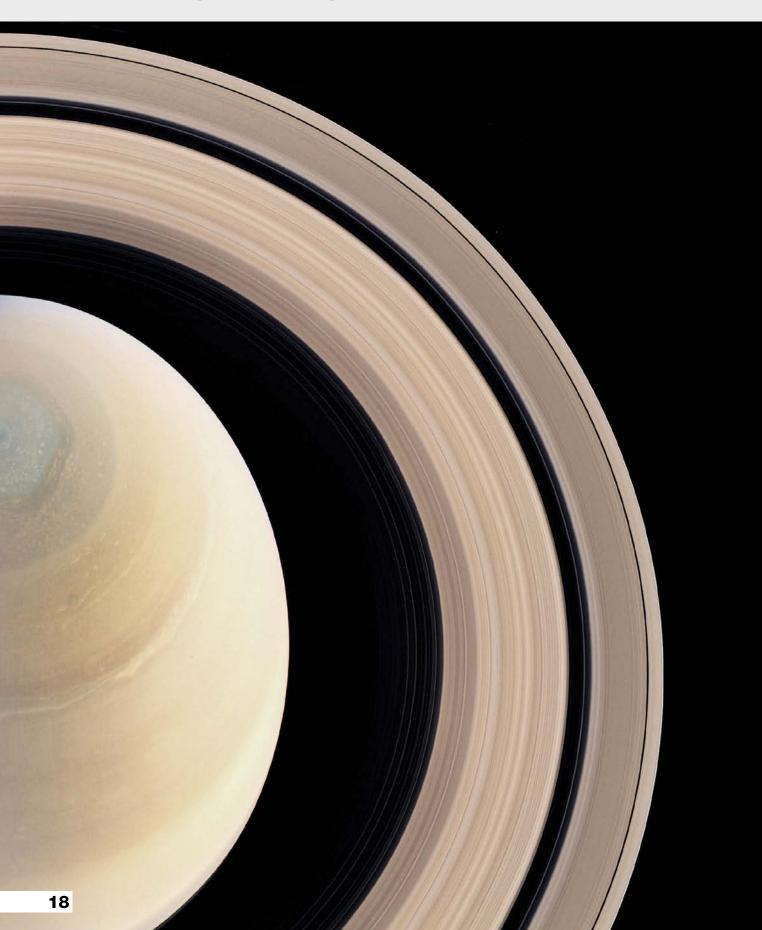

WITH COLOR

BLACK

Surround yourself with the exact **color you want** and the look and feel of **natural wood.** This **2-component** penetrating oil finish is available in **seven base colors** that can be **mixed** and **matched** to create any customized look.

GRAY

Miracle Oil quickly penetrates the wood surface to enable **lasting** protection and color in one easy process. If desired, **top coat** with any Arboritec 2-component finish for easier maintenance and **additional protection.** Designed for commercial and residential wood floors.

WHITE

SPECIAL FEATURE Top-coatable with any Arboritec

2-component finish

CONTENT Urethane-modified linseed oil

Solvent-free

SOLIDS BY VOLUME 100%

VOC Zero VOC

COLORS Black - Grey - White - Natural

Brown - Red-Brown - Red Mahogany

COVERAGE 325-550 ft² per liter

READY FOR FULL USE 12-16 Hours

NATURAL

BROWN

RED-BROWN

Visit **www.arboritec.com/products** for complete floor and finish preparation procedures, application instructions, and

MSDS for Miracle Oil.

RED-MAHOGANY




CUSTOM COLOR

Miracle Oil is a **2-component** penetrating oil finish for wood floors designed to withstand **heavy** wear and tear. It **dries fast** and brings out the **natural grain** of the wood. **Miracle Oil is unique**, because it can be **top-coated** with any Arboritec 2-component waterborne **finish** for **added protection**.

- Quick and easy to apply
- More durable and scratch resistant than traditional solvent-based stains
- **Top-coatable** with any Arboritec 2-component waterborne finish
- **Easy** maintenance
- Based on rich, natural linseed oil
- 100% solid, solvent free
- Zero VOC

These **seven base colors** are only the starting point for all available color options. Unleash your **creative** side by combining colors and different wood species.



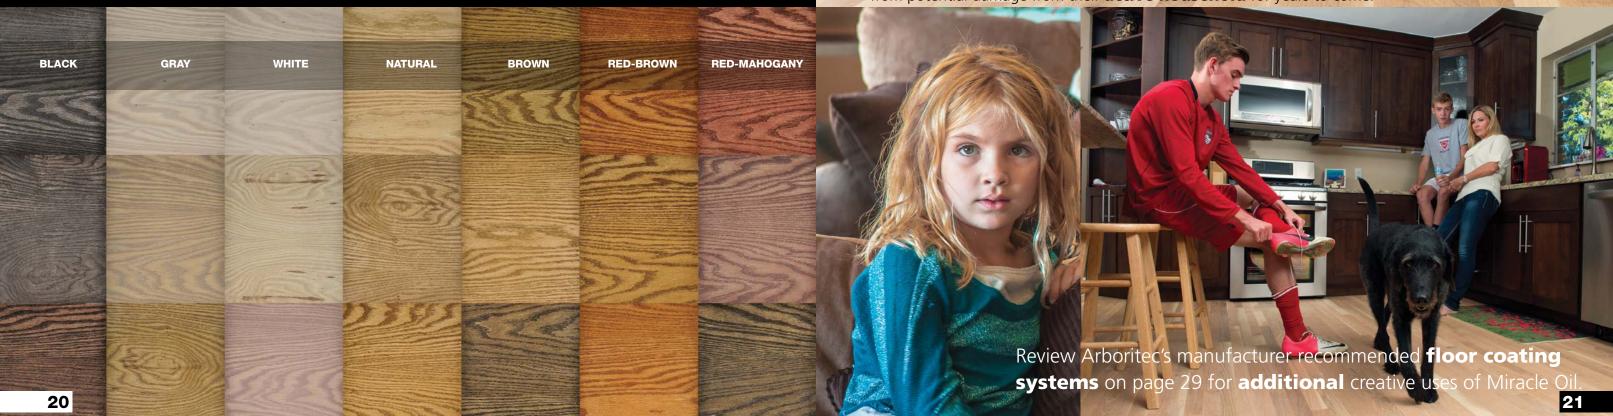

MAINTENANCE SOLUTIONS

NEXT GENERATION RESTORATION & MAINTENANCE FOR RESILIENT FLOORS


UVElite

UVElite can **quickly restore** the factory-applied finish on **resilient** floors. Building owners report **increased floor longevity** and **reduced maintenance costs.** There is no need for frequent scrubbing of the floor or **use of strong** cleaning agents. A recent **study** at St. Catherine's School in Sweden concluded that their UVElite coated **PVC floor** absorbed **50% less dirt** and was **80% easier to clean** than conventional, temporary solutions like polish and wax.



Resilient Floor Comparisons – After One Year



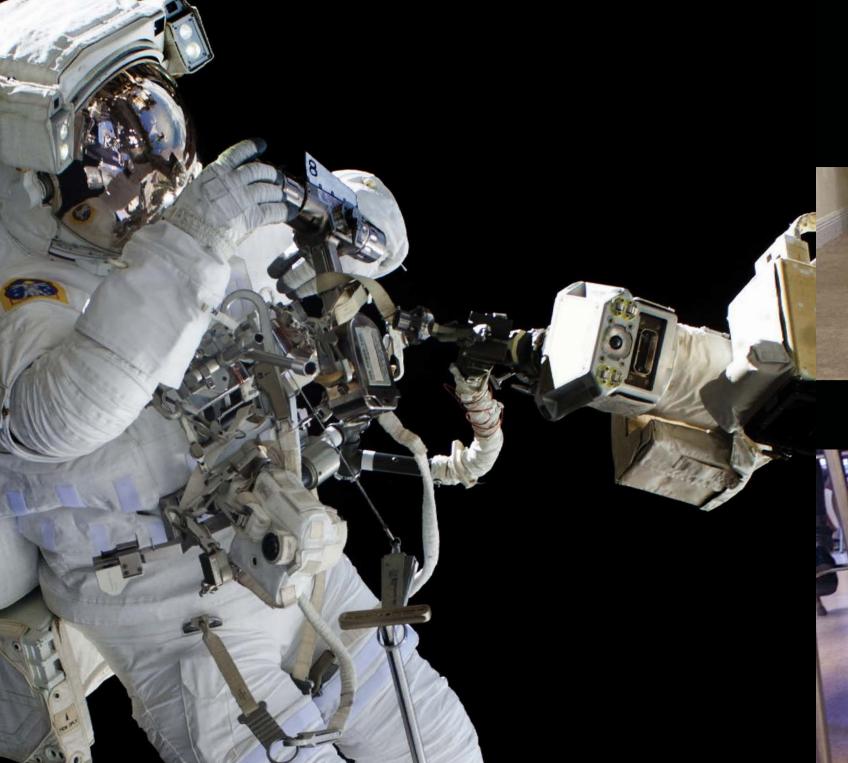

DAILY MAINTENANCE

Arboritec **Wood Floor Cleaner** has been crafted to provide the ultimate in floor care on all **wood and resilient** floors.

- **Solvent free** Safe for the environment
- Removes tough to clean dirt and spills
- **Dries fast** without leaving any streaks and haze
- **Safe** for children and pets
- No harmful odors or toxins
- Ready-to-use and does not need to be diluted
- Available in:
 - 32 oz. spray bottle
 - 1 gallon refill
 - 1 quart (liter) refill
 - Wood Floor Care Kit incl. 32 oz. spray bottle
 - Spray Mop Kits incl. 1 quart (liter) liter refill
- Not for use on waxed floors



Recommended Cleaning Procedure

For **daily maintenance** simply follow a **two-step** procedure of first removing all dirt and dust and then cleaning the floor with Arboritec Wood Floor Cleaner.

Dry - Remove Dirt and Dust

Before using Arboritec Wood Floor Cleaner it is important to remove all dirt and dust which might scratch the surface. Daily cleaning of wood floors should begin by using dry cleaning methods, e.g. dry mopping or vacuuming the floor without the use of rotating brushes. Walk-off mats are recommended in doorways for preventative maintenance to keep out dirt and grit. Natural rubber walk-off mats are recommended over synthetic rubber to minimize any risk of stain.

Wet - Clean the Floor

After removing the dirt and dust, spray Arboritec Wood Floor Cleaner directly onto the floor and disperse using a micro fiber mop. Alternately, microfiber pads may be moistened directly and then used to spread the cleaner in a thin layer onto your floor. It is best to not oversaturate the floor with water, as excessive water can damage wood floors over time. Spot clean heavy traffic areas to remove isolated heel marks, scuffs and spills.

PERIODIC MAINTENANCE

Use Refresher for **occasional** maintenance on polyurethane finished wood floors. Refresher **adds** an extra **layer of protection** to high-traffic areas that have become worn.



Use **Satin Oil** for intermittent maintenance on **oiled floors** to **shield** from **wear** and bring back the **luster** of a newly oiled floor. Satin Oil is an oxidative-hardened **maintenance** oil for **deep cleaning** all oiled wood floors.

Visit **www.arboritec.com/products** for complete floor and finish preparation procedures, application instructions, and MSDS for **maintenance products**.

Refresher

Does not build up laver

ARBORITEC RECOMENDED SYSTEMS



COMMERCIAL SYSTEMS

Arboritec **recommended** systems provided here have been thoroughly tested and are **designed** to deliver consistently reliable results. Our staff consults **directly** with flooring professionals to **advise** them on how our advanced coating technologies can be used to solve a variety of durability challenges.

COMMERCIAL SYSTEMS	INSTANT CURE		TRADITIONAL CURE	
Suggested Use	Heavy Commercial Street Entrances	Light-Medium Commercial Interior Entrances	Heavy Commercial Street Entrances	Light-Medium Commercial Interior Entrances
Key Features	Ceramic Fortified Instant Use of Floors	Ceramic Fortified Instant Use of Floors	Ceramic Fortified	Ceramic Fortified
Base Coat	First Coat	First Coat	First Coat	First Coat
Additional Coats *	3 Coats of UVElite	2 Coats of UVElite	3 Coats of Avenue or Genuine	3 Coats of Elite
Full Cure	Immediate	Immediate	3-5 Days	5-7 Days
Rating	****	****	***	****

^{*} The first coat of UVElite could be **substituted for Avenue**

ACTIVE HOUSEHOLD SYSTEMS

These systems are well **tuned** to the needs of **active** households. For those on-the-go families that entertain or may have **energetic** or **large pets**, a little more **protection** is never a bad idea.

ACTIVE HOUSEHOLD SYSTEMS	INSTANT CURE	TRADITI	ONAL CURE
Suggested Use	Large Households with Pets	Large Households with Pets	Large Households
Key Feature	Ceramic Fortified Instant Use of Floors	Ceramic Fortified	Ceramic Fortified
Base Coat	First Coat or Vibrant	First Coat or Vibrant	First Coat or Vibrant
Additional Coats	1 Coat of Avenue 1 Coat of UVElite	2 Coats of Avenue or Genuine	2 Coats of Elite or Classic+
Full Cure	Immediate	3-5 Days	3-5 Days
Rating	****	****	***

SMALL FAMILY SYSTEMS

These systems deliver the right amount of protection for **less active households** without large pets or heavier traffic.

SMALL FAMILY SYSTEMS		TRADITIONAL CURE	
Suggested Use	High Traffic Households	Average Traffic Households	Light Traffic Households
Key Feature	Ceramic Fortified	Ceramic Fortified	Ceramic Fortified Valued Priced
Base Coat	First Coat or Vibrant	First Coat or Vibrant	First Coat or Vibrant
Additional Coats	2 Coats of Elite	2 Coats of Classic+	2 Coats of Select
Full Cure	5-7 Days	5-7 Days	5-7 Days
Rating	****	****	***

CUSTOM COLOR SYSTEMS

If you are looking to get **creative** with color, look no further than these **custom** color systems. **Miracle Oil** comes in **seven base colors** that can be **mixed** to **achieve an array** of color options for custom floors.

CUSTOM COLOR SYSTEMS	INSTANT OURE	TRADITION	IAL CURE
Suggested Use	High Traffic	High Traffic	High Traffic
Key Feature	Custom Color Instant Use of Floors	Custom Color	Natural Wood Look Custom Color Zero VOC
Base Coat	Miracle Oil	Miracle Oil	
Additional Coats	1 Coat of Avenue or Genuine 2 Coats of UVElite	2-3 Coats of Avenue or Genuine	Miracle Oil
Full Cure	Immediate	3-5 Days	12-16 Hours
Rating	****	****	***

RESILIENT FLOORING SYSTEMS

For **resilient floors**, Arboritec offers instant and traditional cure coating and recoating systems. These systems **extend the life** of existing resilient floors, **improve maintainability**, and **reduce waste**.

RESILIENT FLOORING SYSTEMS	INSTANT CURE	TRADITIONAL CURE
Suggested Use	High Traffic	High Traffic
Key Feature	Instant Use of Floors Added Longevity Easy Cleaning	Added Longevity Easy Cleaning
Base Coat	Avenue	Avenue
Additional Coats	1 Coat of UVElite	1 Coat of Avenue
Full Cure	Immediate	3-5 Days
Rating	****	****

^{*} Preparation procedures will **depend** on floor use, maintenance history, manufacturer and floor type. **Contact Arboritec technical support** for further information.



This guide is provided to help flooring professionals determine the right choice for wood floors depending on level of damage.

In instances of light damage, a buff-and-recoat procedure is a great, cost-effective option to consider.





LIGHT DAMAGE



BUFF & RECOAT product that acts as an adhesion enhancer to prep the existing surface to accept a new coat of

HEAVY DAMAGE



SAND & FINISH Following options have been designed to provide the best solution for heavily damaged





Avenue




Avenue / Genuine

Instant Cure

UVElite

3-5 Days Cure

5-7 Days Cure





First Coat / Vibrant

First Coat / Vibrant



Instant Cure

UVElite

For more heavily damaged floors, where sanding down to bare wood is required, consider the options on the right side of the guide.

ARBORITEC PRODUCT LINE





Visit **www.arboritec.com/products** for complete floor and finish preparation procedures, application instructions, and MSDS.

First Coat

Use First Coat, high-solid clear sealer, to prepare floor surface to accept subsequent top-coats. First Coat minimizes grain raise and provides excellent adhesion on all wood floors.

SPECIAL FEATURE Ceramic Fortified

RECOMMENDED USE Commercial & Residential

CONTENT Polyurethane/Acrylic dispersion

SOLIDS BY VOLUME ~ 40%

VOC Max 100g/L

COVERAGE 400-500 ft² per gallon

DRYING TIME 20-60 min.

PACKAGING 3x1 gallon per box 48 boxes per pallet ITEM NR 21.3005



VibrantDeep Ambering Sealer

Use Vibrant sealer to deepen and add an amber tone to any wood floor. Works exceptionally well on bringing out the natural look of exotic wood species.

SPECIAL FEATURE
RECOMMENDED USE
CONTENT
SOLIDS BY VOLUME
VOC
COVERAGE
DRYING TIME
PACKAGING
SPECIAL FEATURE
Commercial & Residential
Polyurethane/Acrylic dispersion
As 100g/L
400-500 ft² per gallon
20-60 min.
PACKAGING
3x1 gallon per box
48 boxes per pallet

ITEM NR 21.3500



UVElite 1 COMPONENT

Market leading, instant-cure waterborne finish designed for high traffic commercial and demanding residential floors. Low VOC, eco-friendly UV cured finish providing maximum durability.

SPECIAL FEATURE Ceramic Fortified **RECOMMENDED USE** Commercial & Demanding Residential **CONTENT** 100% UV-curable Waterborne PU (Polyurethane) **SOLIDS BY VOLUME** ~ 32% VOC Max 17g/L **GLOSS LEVEL** Ultra matte 5 - Satin 20 - Semi Gloss 45 - Gloss 90 COVERAGE 500-600 ft² per gallon **READY FOR FULL USE** Immediately after UV curing PACKAGING 3x1 gallon per box 48 boxes per pallet ITEM NR Ultra Matte 5 21.1705 21.1605 Satin 20 21.1505 Semi Gloss 45 Gloss 90 21.1405



Elite is a unique commercial-grade 1-component finish. This no-waste, one part has great coverage, excellent toughness and durability. A good choice for light commercial and active households.

SPECIAL FEATURE
RECOMMENDED USE
CONTENT
SOLIDS BY VOLUME
VOC
GLOSS LEVEL
COVERAGE
READY FOR FULL USE
PACKAGING
Waterborne PU (Polyurethane)

~ 32%

Max 200g/L
Matte 15 - Satin 40

COVERAGE
Solid Sper gallon

READY FOR FULL USE
PACKAGING
3x1 gallon per box
48 boxes per pallet

ITEM NR
Matte 15

21.0202
Satin 40

21.0203



Avenue 2 COMPONENT

The flagship of our conventional cure wood floor finishes. Exceptional protection and adhesion on all surfaces: new, resanded and engineered. Designed for high-traffic environments.

SPECIAL FEATURE Ceramic Fortified

RECOMMENDED USE Commercial & Demanding Residential
CONTENT 100% Waterborne PU (Polyurethane)

SOLIDS BY VOLUME ~ 32%
VOC Max 200g/L

GLOSS LEVEL Satin 20 - Semi Gloss 50 - Gloss 85

COVERAGE 350-400 ft² per gallon

READY FOR FULL USE 3-5 Days
PACKAGING 3x1 gallon per box
48 boxes per pallet

ITEM NR Satin 20 21.9245
Semi Gloss 50 21.9145

Gloss 85

Classic+ 1 COMPONENT

A versatile, forgiving finish that performs well over a wide variety of sealers, stains and finishes. If you've never tried a ceramic fortified finish from Arboritec before, Classic+ is a very good place to start.

SPECIAL FEATURE
RECOMMENDED USE
CONTENT
Waterborne Polyurethane/Acrylic dispersion
SOLIDS BY VOLUME
VOC
Max 250g/L
GLOSS LEVEL
Satin 20 - Semi Gloss 45 - Gloss 90
COVERAGE
5-7 Days
PACKAGING
3x1 gallon per box
48 boxes per pallet
ITEM NR
Satin 20
21.1205
Semi Gloss 45
21.1106

Gloss 90





UVElite

COMMERCIAL

Avenue 20

Genuine 2 COMPONENT

rboritec's ultra matte premium finish. Genuine emphasizes the natural eauty of any wood floor and is ideal where the look of a natural wood oor is desired.

21.9045

SPECIAL FEATURE Ceramic Fortified

RECOMMENDED USE Commercial & Demanding Residential

CONTENT 100% Waterborne PU (Polyurethane)

SOLIDS BY VOLUME ~ 30%

VOC Max 165g/L

GLOSS LEVEL Ultra Matte 5

COVERAGE 350-400 ft² per gallon

READY FOR FULL USE 3-5 Days

PACKAGING 3x1 gallon per box
48 boxes per pallet

ITEM NR Ultra Matte 21.9445

Select 1 COMPONENT

A good choice for smaller households and residential floors. This value priced, low-VOC finish is the first entry into Arboritec's world of ceramic fortified finishes.

21.1005

SPECIAL FEATURE Ceramic Fortified **RECOMMENDED USE** Residential **CONTENT** Waterborne Poyurethane/Acrylic dispersion **SOLIDS BY VOLUME** ~ 30% VOC Max 150g/L GLOSS LEVEL Satin 30 - Semi Gloss 45 - Gloss 90 COVERAGE 500-600 ft² per gallon **READY FOR FULL USE** 5-7 Days PACKAGING 3x1 gallon per box 48 boxes per pallet 21.2205 ITEM NR Satin 30 Semi Gloss 45 21.2105 Gloss 90 21.2005



Miracle Oil

Surround yourself with exactly the color you want and the look and feel of natural wood. This 2 component penetrating oil is available in seven base colors that can be mixed and matched to create the customised look you want.



SPECIAL FEATURE Full Cure in 12-16 hours

Top-coatable with any Arboritec 2-component finish.

RECOMMENDED USE Commercial & Residential

 $\begin{tabular}{ll} \textbf{CONTENT} & \textbf{Urethane modified polymer based on linseed oils.} \end{tabular}$

Solvent free. Hardener contains isocyanates.

SOLIDS BY VOLUME 100%

VOC Zero VOC

COLORS Black - Gray - White - Natural

Brown - Red-Brown - Red-Mahogany

COVERAGE 325-550 ft² per quart (liter)

READY FOR FULL USE 12-16 Hours

PACKAGING 1 quart (liter) per box, including hardener

ITEM NR Gray 22.190

 Black
 22.1907

 Brown
 22.1906

 White
 22.1905

 Red-Brown
 22.1904

 Natural
 22.1903

Red Mahogany 22.1902

Satin Oil

Satin Oil is an oxidative-hardened maintenance oil for deep cleaning and periodic maintenance on all oiled wood floors.

RECOMMENDED USE All oiled wood floors

CONTENT Urethane modified pinewood oil,

solvent Paraffin

SOLIDS BY VOLUME ~ 24% VOC 620g/L

COVERAGE 325-550 ft² per

DRYING TIME 3-8 Hours after buffing PACKAGING 6x1 quart (liter) per box

ITEM NR 22.2302



Mini Miracles Sample Kit

Each Mini Miracles Sample Kit contains everything you need to get creative with color: one 4 oz. can of each of the seven base colors in the Miracle Oil line. Also includes graduated droppers for accurate measurement of blended ratios for the hardener.



SPECIAL FEATURE Full Cure in 12-16 hours.

Top-coatable with any Arboritec 2-component finish.

RECOMMENDED USE Commercial & Residential

CONTENT Urethane modified polymer based on linseed oils.

Solvent free. Hardener contains isocyanates.

SOLIDS BY VOLUME 100%

VOC Zero VOC

COLORS Black - Gray - White - Natural

Brown - Red-Brown - Red-Mahogany

COVERAGE 325-550 ft² per quart (liter)

READY FOR FULL USE 12-16 Hours **PACKAGING** 7x4 oz. cans per box

ITEM NR 22.2001

Miracle Oil Sample Chain Set

Miracle Oil Sample Deck is available for purchase though Arboritec distributors. Please call for availability.

ITEM NR 22.2005



Hardener Plus

Included with Arboritec 2-component finishes: Avenue and Genuine. Also available for purchase individually.

> **RECOMMENDED USE** Use with any Arboritec 2-component finish. **CONTENT** Contains Isocyanites PACKAGING 12.8 oz.

> > **ITEM NR** 21.9345

Wood Floor Cleaner

Arboritec Wood Floor Cleaner has been crafted to provide the ultimate in floor care on all wood and resilient floors. Leaves no film and has a neutral, clean scent.

RECOMMENDED USE All factory-, and site finished wood and resilient floors.

COVERAGE 425-500 ft² per 32 oz. Spray bottle

1000-2000 ft² per gallon PACKAGING 3x1 gallon per box

48 boxes per pallet

1 quart (liter) Refill 32 oz. Sprav Bottle

ITEM NR 1 gallon Refill 25.2005

25.2002 1 quart (liter) 25.2001 32 oz. Spray Bottle



Refresher

Use Refresher for periodic maintenance on all polyurethane factory-, or site-finished wood floors. Refresher adds an extra layer of protection to high-traffic areas that have become worn.

RECOMMENDED USE All polyurethane finished wood floors

CONTENT Copolymer-Acrylate **SOLIDS BY VOLUME** ~ 4%

COVERAGE 650 ft² per quart (liter)

DRYING TIME ~ 1 Hour

PACKAGING 1 quart (liter) 12 Bottles per box

ITEM NR 1 quart (liter) Refill

27.1015 32 oz. Spray Bottle 27.1005

Spray Mop Kit

This cartridge style spray mop has a handy spray handle to easily and precisely control the even disbursement of cleaner. Includes spray mop pole, mop base, 15 inch microfiber pad and 1 liter Wood Floor Cleaner.

> **RECOMMENDED USE** All factory-, and site-finished wood and resilient floors. INCLUDES 1 quart (liter) Cleaner Refill, 15 inch Microfiber Pad &

Easy to handle Spray Mop Pole ITEM NR Spray Mop Kit



Clean'n Coat

Clean 'n Coat is an adhesion enhancer that deep cleans and prepares the surface to accept a new coat of finish. Used on all polyurethane factory-, and site-finished wood floors.

RECOMMENDED USE All polyurethane factory- and site-finished wood floors

COVERAGE 425-500 ft² per 32 oz. Spray bottle

1500-2000 ft² per gallon

DRYING TIME 1-2 Hours

PACKAGING 3x1 gallon per box

48 boxes per pallet

12 Bottles per box

25.2801 32 oz. Spray Bottle

ITEM NR 1 gallon Refill 25.2805

Wood Floor Care Kit

Wood Floor Care Kit is designed for optimal cleaning results. Includes a sturdy aluminum pole that adjusts to a variety of heights for comfort, a 32 oz. bottle of Wood Floor Cleaner, and a microfiber mop pad.

RECOMMENDED USE Commercial & Residential

INCUDES 32 oz. Cleaner Spray, 17 inch Microfiber Pad

& Telescopic Mop Pole

ITEM NR Wood Floor Care Kit 26.1003





BORTEC Refresher

Microfiber Pad

Spray Mop Kit Replacement

This 15 inch microfiber pad effectively traps and removes dirt and dust from floor surface. Designed for use with Arboritec Spray Mop Kit. Machine washable. Avoid fabric softeners for optimal, long-term results.

RECOMMENDED USE All wood and resilient floors.
PACKAGING 1 Microfiber cleaning pad per package
ITEM NR 15 inch 26.5003



Use these 10 mm microfiber roller sleeves with any Arboritec waterborne for best results.

RECOMMENDED USE Use with Arboritec roller handle and adjustable telescopic roller pole.

PACKAGING 10 Sleeves per box 12.1007



Microfiber Pad

Wood Floor Care Kit Replacement

This 17 inch microfiber pad effectively traps and removes dirt and dust from floor surface. Designed for use with Arboritec Wood Floor Care Kit. Machine washable. Avoid fabric softeners for optimal, long-term results.

RECOMMENDED USE All wood and resilient floors.
PACKAGING 10 Microfiber cleaning pad per package
ITEM NR 17 inch 26.5002

Roller Sleeve

Use these 8 mm roller sleeves with any waterborne or oil-based finish.

RECOMMENDED USE Use with Arboritec roller handle and adjustable telescopic roller pole.

PACKAGING 10 Sleeves per box 12.1008



Roller Handle

This sturdy roller handle fits all Arboritec roller sleeves. Designed with a convenient snap mount handle.

RECOMMENDED USE Use with Arboritec adjustable telescopic roller pole. **PACKAGING** 10 Handles per box **ITEM NR** 12.1006



Adjustable inter-locking roller pole that extends to 6.5 feet. Use the snap mount end to lock in the roller handle for ease of use.

RECOMMENDED USE Use with Arboritec roller handle.
PACKAGING 8 telescopic poles per box
ITEM NR 12.1011







ARBORITEC FLOORING ELITE



MEMBERSHIP BENEFITS

Working with Arboritec has advantages from our **technology** to how we **support** our best customers.

Flooring Elite members receive **exclusive** promotional opportunities and **benefits:**



- Access to sales leads
- **Promotional** programs
- **Premium marketing** materials


The Arboritec **Flooring Elite** is a growing **network of professionals** with the technical **expertise** to guide you through the process of making **the ideal** flooring decision. Arboritec's Flooring Elite focuses on providing **practical solutions** to floor restoration challenges.


Contractors who make up **Arboritec's** Flooring Elite **network** have been **trained** on optimal application procedures, and have the necessary **technical** know-how to **apply any Arboritec** floor finishing system – including **instant-cure** solutions.

For membership details, visit **www.arboritec.com**, email **usa@arboritec.com** or simply call our **customer support line** at **(877) 416-5972**

FUTUREPROOF YOUR FLOORS







- (ArboritecUSA)
- (Arboritec
- in /Arboritec-USA